

## NPM TECH 2

## Automated Flash Point Tester Pensky-Martens



\*Photos are non-contractual - they may differ from actual products

### STANDARDS

Conforms to ASTM D 93, IP 34, ISO 2719 and related methods


### SCOPE

These test methods cover the determination of the flash point for all types of products in the temperature range from 40 °C to 400 °C by a manual Pensky-Martens closed-cup apparatus or an automated Pensky-Martens closed-cup apparatus, and the determination of the flash point of biodiesel in the temperature range of 60 °C to 190 °C by an automated Pensky-Martens closed cup apparatus.

# Automated, fast and reliable!

## TECHNICAL FEATURES

- Temperature range from **ambient to 400°C**
- Temperature display in °C or °F
- **Compact device**
- 4.3'' **resistive** color **touchscreen**
- **5 predefined methods** (A/A+/B/C/Research)
- **2 modes** : research and safety
- Fast cooling system by fan
- **Automatic presentation**
- **Double fire detection** ionization and optical
- Automatic **detection by thermocouple** (no calibration required)
- Adjustable power **electric ignitor** (no gas)
- Electronic barometric correction with temperature compensation
- Adjustable and settable stirring speed from **0 to 250rpm**
- Preheating sample with or without stirring
- Removable holder for cover, lid and nitrogen bottle

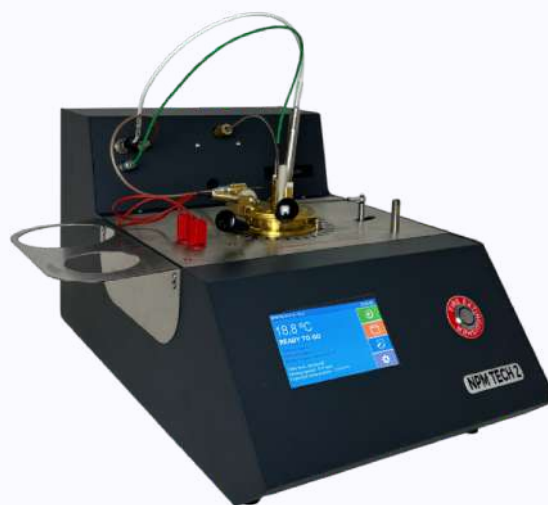

\*Photos are non-contractual - they may differ from actual products

## CONNECTIVITY

- 1 RS232C (LIMS or printer) port
- 2 mini USB ports only for update
- Nitrogen (N2) Quick connector for fire extinguishing

## FIRE DETECTION

- **Automatic fire extinguishing** (N2 nitrogen bottle in option)
- **3 release modes:**
  - Optical
  - Ionization
  - Manual (by push-button)
- An **automatic N2 fire extinguisher** available (option):
  - Allow a fire to be switched off by smothering
  - Acts on fire by reducing the oxygen content
  - Very fast diffusion during emission
  - Density comparable to air (78% nitrogen)
  - Maintains extinction concentration over time

## APPLICATIONS

- Waste products
- Commercial labs
- Bio diesel plants
- Safety, environmental labs
- Stations, fuel depots, terminals
- Power plants, Refineries
- Paints, lacquers, perfumes
- Cars, engines manufacturer

## SAFETY

- Protection of the electric ignitor by thermal fuse (automatic reset)
- Dedicated alarm for each error message
- Audible alarm
- Visual indicator
- 3 release modes in case of fire



## SOFTWARE

- User-friendly and intuitive
- Predefined methods
- Predefined rates (method A/A+/B/C)
- Simplified temperature calibration
- Up to 5 calibration offsets
- Software update through mini USB
- Multilingual (FR/EN)
- Data transfer or print (RS232C)
- 20 lasts results in memory
- Access protected by password

## DISPLAY

Access from basic to advanced parameters made easy through the intuitive software and large screen

- Data export through LIMS and printer
- User and password settings
- Product files configuration

### OPTIONS

- N2 nitrogen bottle for automatic fire extinguishing
  - Metal probe



N2 nitrogen bottle



Metal probe

# SCOPE OF DELIVERY

**42600**    **The NPM TECH 2** is delivered ready to use with

- 1 lid with ignitor and thermocouple
  - 1 cup
  - 1 power cable
  - 1 stirring cable
  - 1 stylus
- 1 removable holder for cup and nitrogen bottle
  - 1 conformity leaflet
  - 1 USB key (with instruction manual)

## Site requirements

- **Dimensions** (without holder) (mm): (W) 272 x (D) 450 x (H) 247
  - **Dimensions** (with holder) (mm): (W) 362 x (D) 450 x (H) 247
- **Power supply:** 230 V, 50/60 Hz, 5 A
  - **Weight:** 11,5 kg
  - **Nitrogen:** max 10 Bars

# SUMMARY

Temperature range	Ambient to 400°C
Temperature resolution	0,1°C
Temperature unit	°C or °F
Temperature measurement	Probe PT 100 (class B)

Detection	Thermocouple
Extinguisher button	Integrated & illuminated
Fire detection	Ionization & optical
Cooling system	Mechanical fan



Prüfgeräte für Petrochemie,  
Gefahrgutanalytik und mehr

Contact:  
G-Labo GmbH  
Phone: +49 6209 797100  
Mail: [info@g-labo.de](mailto:info@g-labo.de)  
Web: [www.g-labo.de](http://www.g-labo.de)